

CFD researched on rice husk gasification in a pilot fixed bed up-draft system

- Le Thi Kim Phung ¹
- Tran Tan Viet ¹
- Nguyen Luu Minh Thien ¹
- Pham Vuong Viet ¹
- Nguyen Thanh Truc ¹
- Le Anh Kien ²
- Nghiep Quoc Pham ²
- Duyen Khac Le ²

¹ Ho Chi Minh city University of Technology, VNU-HCM

² Institute for Tropicalisation and Environment

(Manuscript Received on July, 2016, Manuscript Revised on September, 2016)

ABSTRACT

Finding alternative energy sources for fossil fuels was a global matter of concern, especially in developing countries. Rice husk, an abundant biomass in Viet Nam, was used to partially replace fossil fuels by gasification process. The study was conducted on the pilot plant fixed bed up-draft gasifier with two kind of gasification agents, pure air and air-steam mixture. Mathematical modeling and computer simulations were also used to describe and optimize the gasification processes. Mathematical modeling was based on

Computational Fluid Dynamics method and simulation was carried by using Ansys Fluent software. Changes in outlet composition of syngas components (CO, CO₂, CH₄, H₂O, H₂) and temperature of process, in relation with ratio of steam in gasification agents, were presented. Obtained results indicated concentration of CH₄, H₂ in outlet was increased significantly when using air-steam gasification agents than pure air. The discrepancies among the gasification agents were determined to improve the actual process.

Keywords: CFD; gasification; rice husk; Ansys Fluent; UDFs.

1. INTRODUCTION

With the continuous development of economy and technology, people's living

standards were constantly being enhanced and thereby energy demand surged in Vietnam. The primary energy demand was estimated to

escalate annually at 3.9%, from 38 million tons of oil equivalent (MToe) in 2008 to 109 MToe by 2030. Vietnam was expected to become a country subjected to significant dependence on energy and an economy importing energy after 2020 [1]. Besides, Vietnam was located in the tropical monsoon area so the plants grow faster. As an agricultural country with a high proportion of the economy, Vietnam has huge biomass energy sources, specially rice husk, the by-products of rice production. So if it takes advantage of the energy from the abundant by-products of rice, it can meet 27% of demand for primary energy consumption [2]. Gasification was a potential technology can replace fossil energy sources. Therefore, the study of gasification, sophisticated technology, was one of the urgent issues. Modeling methods, was carried out in recent years, can be divided into 4 groups: thermodynamic equilibrium, kinetic, Computational fluid dynamics (CFD), Artificial neural network [3]. Computational Fluid Dynamics (CFD) can be employed to investigate this process in detail by linking experimental data and numerical simulation and helping to reduce the complexity of experimental work. Gasification was a multiphase model that was mixed with chemical reactions. To solve this model, there were two approaches: the discrete element method (DEM) and Eulerian approaches. For DEM-based simulation, the framework for the application of the natural and physical models was provided. But it was computationally expensive, especially when the chemical reactions were supplemented [4].

In this research, the model was simulated on Ansys Fluent combined UDFs (User - Defined Functions) and C code with Eulerian

approaches to model the gasification process. Geometry dimensions, temperature of combustion zones, height of combustion zone in the model were obtained from the pilot updraft gasification system of rice husk. The purpose of this study was to improve the gasification of rice husk and towards optimizing the operational processes.

2. MODEL DESCRIPTION

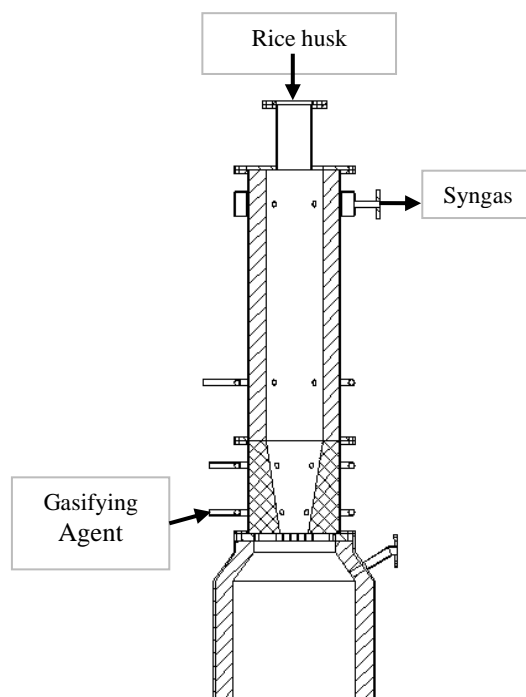


Figure 1. The pilot updraft gasification system.

The pilot updraft gasification system was showed in Figure 1, the gas obtained on the top of gasifier. AutoCAD software was used to create geometry for this system, ICEM CFD was used for the meshing process. Pilot equipment whose height was 740mm in cylindrical section, 260 mm in cone section.

3. RICEHUSK CHEMICAL FORMULA

Rice husk was a complex mixture of organic substances consisting mainly of components: Carbon, Hydrogen and Oxygen. Proximate and ultimate analyzes of rice husk were given in Table I and Table II [14].

Table 1. Proximate analysis of rice husk

Characteristics	% by weight
Moisture	6.47
Combustible Matter	81.83
Ash	11.7

Table 2. Ultimate analysis of rice husk

Component	% by weight dry ash free basis
C	48.69
H	6.97
N	0.37
O	43.97

The identification of the chemical formula of biomass was quite complicated, some approximation method was employed to determine relatively its chemical formula. One approach was based on utilization of elemental composition from ultimate analysis of dry biomass and could be displayed as in Eq (1-3) which was based on a single atom of carbon [5]

Typical chemical formula of biomass was $C_cH_hO_o$.

$$c = 1$$

$$h = \frac{H_{\%} \times M_C}{C_{\%} \times M_H} = 1,72 \quad (1)$$

$$o = \frac{O_{\%} \times M_C}{C_{\%} \times M_O} = 0,68 \quad (2)$$

Based on data from Table II, the amount of oxygen was calculated by subtracting the

amount of carbon and hydrogen, the formula of the husks was obtained. The molecular mass of biomass was estimated as:

$$M_{biomass} = M_C \times c + \frac{M_{H_2}}{2} \times h + \frac{M_{O_2}}{2} \times o \quad (3)$$

4. MATHEMATICAL MODEL

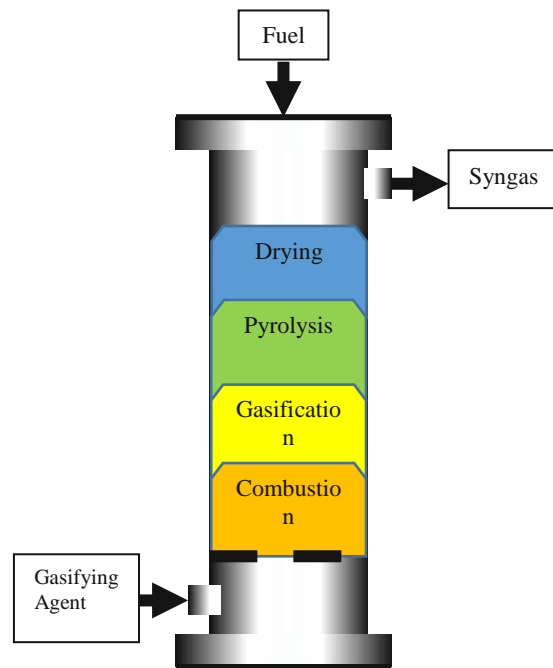


Figure 2. Fixed-bed updraft gasifier

Gasification model was divided into 4 zones: drying, pyrolysis, gasification and combustion. Figure 2 showed various zone from updraft gasifier system.

Rice husk was entered in accordance with the composition of the proximate analysis: Combustibles matter, Moisture and Ash. Gasification Scheme was showed in Figure 3.

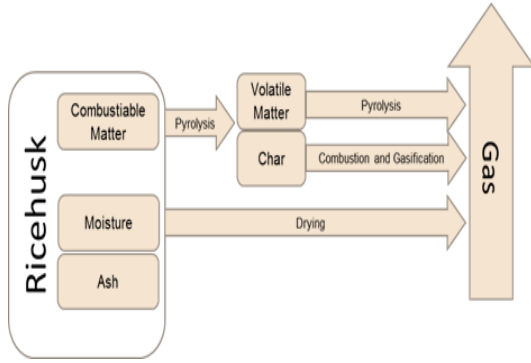


Figure 3. Schematic of the ricehusk gasification

4.1. Governing Equations

The mass, energy and species equations of the gas phase and solid phase were described as follow:

1) Mass conservation

Gas Phase

$$\frac{\partial(\varepsilon_g \rho_g)}{\partial t} + \nabla \cdot (\varepsilon_g \rho_g v_g) = 0 \quad (4)$$

Solid Phase

$$\frac{\partial(\varepsilon_s \rho_s)}{\partial t} + \nabla \cdot (\varepsilon_s \rho_s v_s) = 0 \quad (5)$$

2) Energy Equation

Gas Phase

$$\frac{\partial((1-\phi)\rho_s c_{ps} T_s)}{\partial t} + \nabla(\phi \rho_g u_g c_{pg} T_g) = \nabla(\lambda_g \nabla T_g) + A_s h_s (T_g - T_s) + S_{T_g} \quad (6)$$

Solid Phase

$$\frac{\partial((1-\phi)\rho_s c_{ps} T_s)}{\partial t} + \nabla((1-\phi)\rho_s u_s c_{ps} T_s) = \nabla(k_{eff} \nabla T_s) + (\nabla q_r) - A_s h_s (T_g - T_s) + S_{T_s} \quad (7)$$

3) Species Equation

Gas Phase

$$\frac{\partial(\phi \rho_g Y_{ig})}{\partial t} + \nabla(\phi \rho_g u_g Y_{ig}) = \nabla(D_{ig} \nabla(\phi \rho_g Y_{ig})) + S_{Y_g} \quad (8)$$

Solid Phase

$$\frac{\partial((1-\phi)\rho_s Y_{is})}{\partial t} + \nabla((1-\phi)\rho_s u_s Y_{is}) = S_{Y_s} \quad (9)$$

4) Momentum conservation

Gas Phase

$$\frac{\partial(\varepsilon_g \rho_g v_g)}{\partial t} + \nabla(\varepsilon_g \rho_g v_g v_g) = -\varepsilon_g \nabla p + \nabla \bar{\tau}_g + \varepsilon_g \rho_g g + K_{gs} (u_g - u_s) \quad (10)$$

Solid Phase

$$\frac{\partial(\varepsilon_s \rho_s v_s)}{\partial t} + \nabla(\varepsilon_s \rho_s v_s v_s) = -\varepsilon_s \nabla p + \nabla \bar{\tau}_s + \varepsilon_s \rho_s g + K_{gs} (u_g - u_s) \quad (11)$$

5) Porous media

Porous Media Model was used for describe flow through packed beds. Porous media were modeled by the addition of a momentum source term to the standard fluid flow equations. The source term was composed of two parts: a viscous loss term and an inertial loss term [6].

$$S_i = - \left(\sum_{j=1}^3 D_{ij} \mu v_j + \sum_{j=1}^3 C_{ij} \frac{1}{2} \rho |v| v_j \right) \quad (12)$$

The permeability and inertial loss coefficient in each component direction could be identified as:


$$\alpha = \frac{D_p^2}{150} \frac{\varepsilon^3}{(1-\varepsilon)^2} \quad (13)$$

$$C_2 = \frac{3.5}{D_p} \frac{(1-\varepsilon)}{\varepsilon^3} \quad (14)$$

4.2. Chemical Kinetics Model

1) Drying

The moisture in the biomass was evaporated as the high-temperature:



Evaporation-Condensation Model in ANSYS Fluent was applied in drying process. The evaporation-condensation model was a mechanistic model with a physical basis. It was available with the mixture and Eulerian multiphase models. Based on the following temperature regimes, the mass transfer can be described as follows: [11]

If $T > T_{sat}$


$$\dot{m}_{e \rightarrow v} = coeff * \alpha_1 \rho_l \frac{(T - T_{sat})}{T_{sat}} \quad (16)$$

If $T < T_{sat}$

$$\dot{m}_{e \rightarrow v} = coeff * \alpha_v \rho_v \frac{(T - T_{sat})}{T_{sat}} \quad (17)$$

2) Pyrolysis

The pyrolysis reaction was expressed as:



Pyrolysis reaction was based on practical assumptions that have been supported by the experimental results of biomass pyrolysis. Several hypotheses for present pyrolysis zone model have been employed which was based on the fact that the connection between H and O was far higher than that of C and O [5].

80% of fuel oxygen (O) was connected with fuel hydrogen (H) in the form of H_2O .

20% of fuel oxygen (O) was connected with fuel carbon (C) and releases as CO and CO_2 .

The molar ratio of CO and CO_2 was inversely proportional with their molecular mass.

$$\frac{n_{CO}}{n_{CO_2}} = \frac{44}{28} \quad (19)$$

50% of available hydrogen in fuel releases as H_2 on decomposition.

Remaining 50% of available hydrogen in fuel was released in the form of CH_4 and C_2H_2 .

Molar ratio of CH_4 and C_2H_2 was inversely proportional with their molecular mass.

Based on the results we obtained stoichiometric of pyrolysis equation of rice husk was:

Table 3. Stoichiometry of pyrolysis reaction

	C	CO ₂	CO	CH ₄
n _p	0.767	0.038	0.06	0.06
	H ₂	C ₂ H ₂	H ₂ O	
n _p	0.158	0.037	0.544	

The reaction rate of pyrolysis was expressed by the one-step reaction model. [7]


$$r_p = \rho_{ricehusk} \times A_p \times e^{\left(\frac{E_p}{R \times T_{solid}}\right)} \quad (20)$$

$$A_p = 10^{4.03} \frac{1}{s} \quad E_p = 8.79 \times 10^7 \text{ J/mol}$$

4.3. Char Consumption

1) Char Gasification

The reactions occurred in the gasification zone include the gasification reactions of char and water, carbon dioxide and hydrogen.



The reaction rate of char gasification reaction depended on several effects like mass transfer in the gas phase, diffusion, chemical reaction and the particle surface. The overall reaction rate was introduced. [7]

$$r_{g,i} = \frac{X_i}{\frac{1}{k_g} + \frac{1}{r_{chem,g,i}}} * A_p \quad (24)$$

with $i = H_2O, CO_2, H_2$


$$r_{chem,g,i} = A_i * \exp\left(-\frac{E_i}{R * T_{solid}}\right) \quad (25)$$

$$K_g = \frac{2.06 * V_{gas}}{\varepsilon} * Re^{-0.575} * Pr^{\frac{2}{3}} \quad (26)$$

Kinetic constants for the gasification reactions were listed in Table 4.

2) Char Combustion

In Combustion Zone, rice husk char oxidized with the supplied air



Similarly, to the gasification reactions an overall reaction was introduced [7]

$$r_c = \frac{PO_2}{\frac{1}{(2 * k_{ox})} + \frac{1}{\left(\frac{M_{gas}}{M_{solid}} * r_{chem,cl}\right)}} * A_p \quad (28)$$

$$r_{chem,cl} = A_{c1} * \exp\left(-\frac{E_{c1}}{R * T_{solid}}\right) \quad (29)$$

$$k_{ox} = \frac{1.57 * \nu_{gas} * \rho_{gas} * Sc^{\frac{2}{3}} * Re^{-0.41} * (1-\varepsilon)^{0.2}}{M_{gas} * p} \quad (30)$$

The proportion of CO and CO₂ formation was inversely proportional to the exothermicity of their reactions. [5]

$$\frac{n_{CO}}{n_{CO_2}} = \frac{\alpha}{1-\alpha} = 3.5606 \quad (31)$$

Kinetic constants for the combustion reactions were also listed in Table 3.

Table 4. Kinetic data of char consumption reaction [8-10]

Reaction	A	Unit	E	Unit
r_c	4750	kgm ² s ⁻¹	2x10 ⁸	J/kmol
rg, H ₂ O	107	ms ⁻¹ K ⁻¹	1.256x10 ⁸	J/kmol
rg, CO ₂	107	ms ⁻¹ K ⁻¹	1.256x10 ⁸	J/kmol
rg, H ₂	104	ms ⁻¹ K ⁻¹	1.256x10 ⁸	J/kmol

4.4. Homogeneous reactions

Homogeneous reactions in the gas phase included water - gas shift reaction and combustion reactions between CO₂, H₂, CH₄, C₂H₂. The kinetic data of combustion reaction obtained from ANSYS FLUENT DATABASE. Table 4 showed kinetic data of gas phase reactions

Table 5. Kinetic data of gas-phase reaction [12-13].

Reaction	A kmolm ³ s ⁻¹	E J kmol ⁻¹
$CO + H_2O \leftrightarrow CO_2 + H_2$	1389	1.256x10 ⁷
$CO + \frac{1}{2}O_2 \rightarrow CO_2$	1.7x10 ⁸	2.239x10 ¹²
$H_2 + \frac{1}{2}O_2 \rightarrow H_2O$	3.1x10 ⁷	9.87x10 ⁸
$CH_4 + 2 O_2 \rightarrow CO_2 + 2 H_2O$	2.027x10 ⁸	2.119x10 ¹¹
$C_2H_2 + 2,5 O_2 \rightarrow 2 CO_2 + H_2O$	1.25x10 ⁸	3.655x10 ¹⁰

5. SIMULATION WITH ANSYS FLUENT CFD

Simulations were conducted on ANSYS FLUENT 14.5 software, the Solver Type was pressure-based, velocity formulation was absolute and type of time was transient. Initial column of rice husk in the model was 450 mm in length. The amount of gasifying agents was on the speed level of 0.1 m/s. Steam agent was saturated steam at a temperature of 1 atm: 373K.

Table 6. Operation conditions for running simulation

Case	Temp	Steam/air Ratio	Mole Fraction O ₂	Mole Fraction N ₂	Mole Fraction H ₂ O
	K	vol/vol	mol/mol	mol/mol	mol/mol
1	300	0	0.21	0.79	0
2	314.6	0.2	0.168	0.632	0.2
3	329.2	0.4	0.126	0.474	0.4
4	343.8	0.6	0.084	0.316	0.6
5	358.4	0.8	0.042	0.158	0.8

6. RESULTS AND DISCUSSION

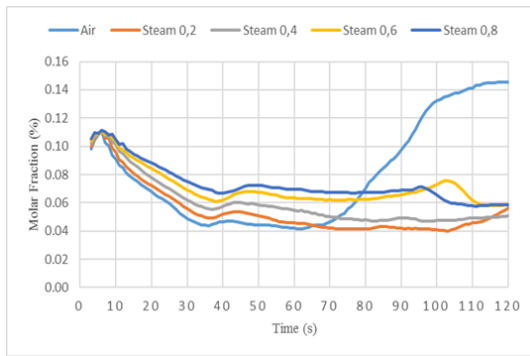


Figure 4. Changes of the molar fraction (%) of CO versus time (s) in various cases (Table 6)

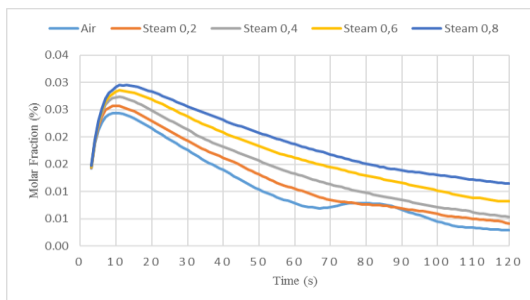


Figure 5. Changes of the molar fraction (%) of C₂H₂ versus time (s) in various cases (Table 6)

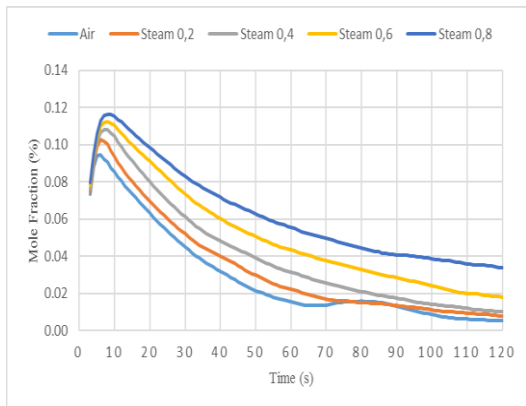


Figure 6. Changes of the molar fraction (%) of CH₄ versus time (s) in various cases (Table 6)

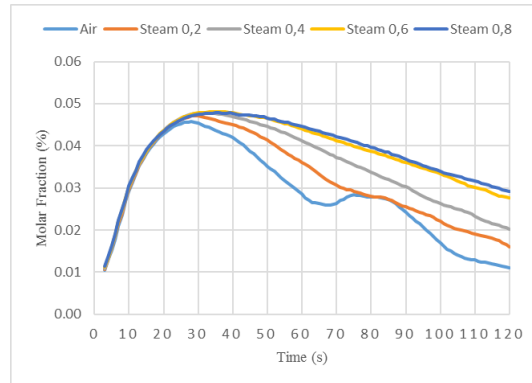


Figure 7. Changes of the molar fraction (%) of H₂ versus time (s) in various cases (Table 6)

Figure 4-7 described the changes of the molar fraction over time from 3s to 120s.

Overall, the composition of gas with using air-steam agent were higher than using air agent, except CO. Comparing the effect of different steam/air ratio, it could be seen that increase of the ratio result in higher molar fraction of gas (C₂H₂, CH₄, H₂) caused by the transition of hydrogen from steam to syngas through gasification reactions and water-gas shift reaction.

In Figure 4, the amount of CO in process using air agent was increased dramatically at 70s because the drying process was reached equilibrium. A decrease in moisture content drove a water gas shift reaction toward the side with more CO.

This model using non-continuous approach resulted in decrease of combustible gas over time.

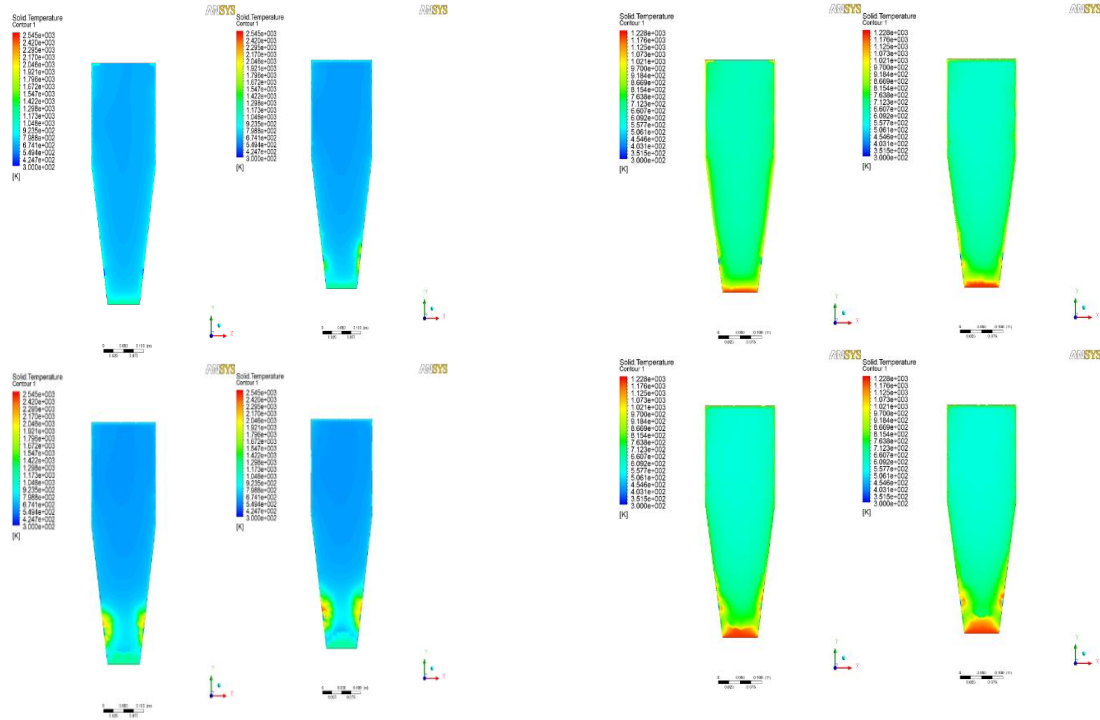


Figure 8. Contour of solid temperature at (a)30s, (b) 60s, (c)90s, (d)120s in case 1 (Table 6)

Figure 10. Contour of solid temperature at (a)30s, (b) 60s, (c)90s, (d)120s in case 3 (Table 6)

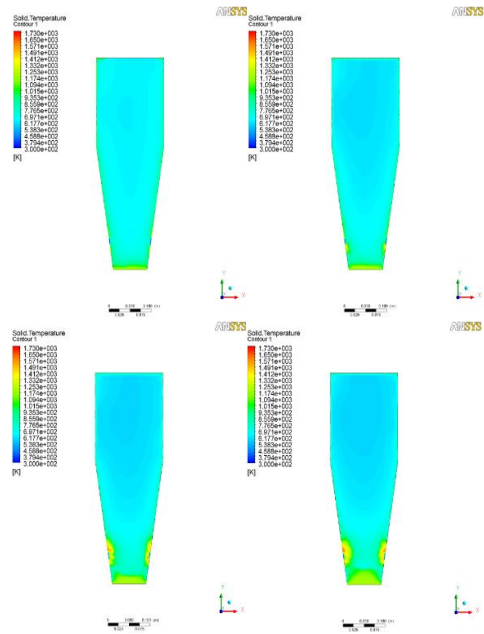


Figure 9. Contour of solid temperature at (a)30s, (b) 60s, (c)90s, (d)120s in case 2 (Table 6)

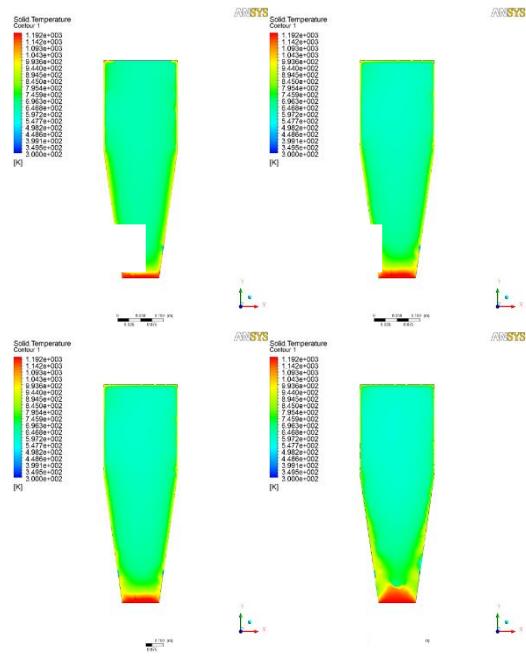


Figure 11. Contour of solid temperature at (a)30s, (b) 60s, (c)90s, (d)120s in case 4 (Table 6)

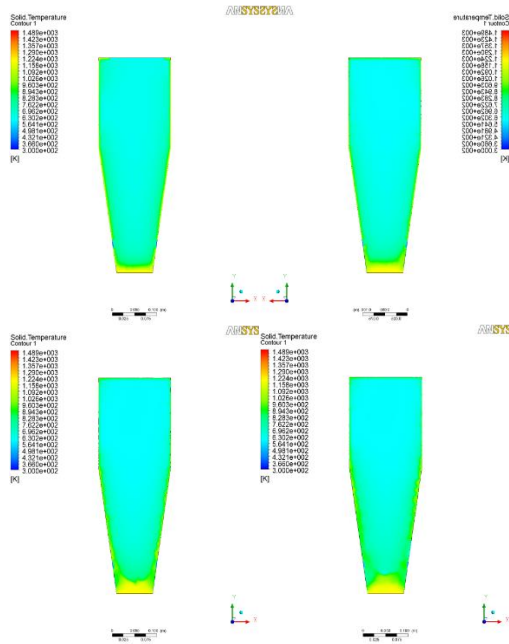


Figure 12. Contour of solid temperature at (a)30s, (b) 60s, (c)90s, (d)120s in case 5 (Table 6)

Figure 8 showed that the temperature surrounding air-supplying door was high dramatically. It could be explained that combustion reactions occurred strongly and combustion zone gradually expanded over time because this was a batch-system. The amount of biomass reduced while gasification agents were fed constantly.

In Figure 8-12, while the steam content of the gasification agents was increasing, the temperature of the process decreased. Combustion process decreased and gasification one increased gradually which demonstrated gasification process was significantly affected by steam-air gasification agents.

Figure 12 showed that when steam-air gasification agent consisted of 80% steam, the temperature of areas in the process had the temperature ranging from 600K to 700K

leading to gasification process operated more effectively.

Figure 13 shows validation of present model with experimental data [15] which was in well agreement. The average composition of CO₂, CO, CH₄, H₂, N₂ were compared with Raharjo's calculation and experimental data from the rice husk gasification system using air agent. Table VII provides syngas composition results using air without steam as gasifying agent according to the experimental data, calculations and CFD model. The H₂/CO of CFD model obtained from Table VII was 0.362, it was quite similar to the experimental data (0.348).

Figure 14 showed steam/air ratio was proportional with composition of H₂ in both CFD model and experimental data [15]. It's also displayed experimental points was located quite close to the modelling points, so the simulation was quite suitable with experiment.

Table 7. Syngas composition results.

Comp	Raharjo's literature		CFD model %
	Experimental data %	Calculation %	
N ₂	79.3842	55	63.6652
H ₂	1.2939	2.8243	4.3656
CO	3.7162	8.1117	12.047
CH ₄	2.689	5.8695	4.4334
CO ₂	12.9168	28.1947	15.4889
Total	100	100	100

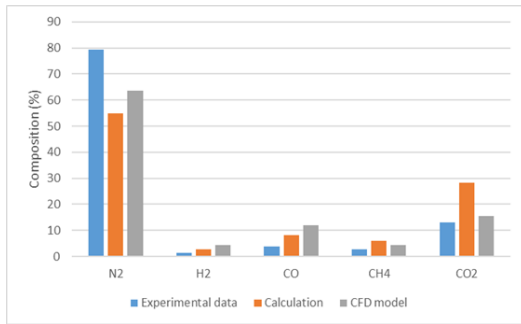


Figure 13. Model validation against Raharjo 's calculation and experimental data

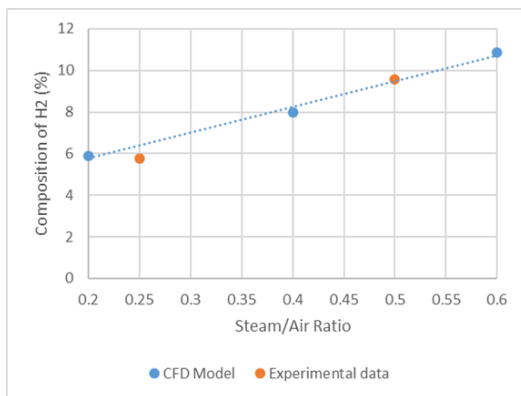


Figure 14. The effect of steam/air ratio on H₂ compositions in both CFD model and experimental data.

7. CONCLUSION

The CFD model of gasification process with Euler-Euler approach combining with UDFs code was applied in this research. Entire process model was able to be simulated by 2D CFD model, it was important means in understanding mechanism of process and the composition of syngas, outlet temperature, velocities and reaction rates for the gas and solid phase in function of time and space. With non-continuous approach, the main disadvantage of this model was long computational time. The result from this research demonstrated the promising way to predict the effect of various gasification agents

on composition of outlet-gas. This outcome can be used to maximize efficiency for operating updraft gasification system. Furthermore, the comprehensive CFD model and chemical kinetic model needed to be improved by more experimental work and further information about outlet syngas composition and temperature from pilot system.

***Acknowledgements:** This research was funded by Vietnam Government through the Project "Assessment and develop technological solutions for the efficient utilization of biomass resources (rice husk) to produce sustainable energy for the development of economy in Mekong Delta region"*

NOMENCLATURE

A pre-exponent factor, particle surface area 1/s, m²

A_p particle surface area (m²)

C_p specific heat capacity J/kgK

C₂ inertial loss coefficient

D_g mass diffusion coefficient of gas m²/s

D_p mean particle diameter m

E activation energy kJ/mol

h_s convective mass transfer coefficient

h_s' convection heat transfer coefficient W/m²K

keff effective thermal conductivity W/mK

Pr Prandtl number

q_r radiative flux density W

Re Reynolds number

Sc Schmidt number

S_□ source term

T _g	gas temperature K	P	density
T _s	solid temperature K	λ_g	thermal dispersion coefficient
T _{sat}	saturated temperature K	Subscripts	
Y _v	mass fraction of volatile matter	b	Bulk
U	velocity component m/s	C	char burnout
Greek letter		eff	Effective
A	absorption coefficient	f	Fluid
\square	permeability coefficient	g	Gas
ϕ	void fraction in bed	p	Particle
ε	dissipation rate of turbulent kinetic energy m ⁻² s ⁻³	s	Solid
		sg	solid to gas

Nghiên cứu CFD về khí hóa trấu trên hệ thống khí hóa ngược chiều quy mô pilot

- Lê Thị Kim Phụng¹
- Trần Tấn Việt¹
- Nguyễn Lưu Minh Thiện¹
- Phạm Vương Việt¹
- Nguyễn Thanh Trúc¹
- Lê Anh Kiên²
- Phạm Quốc Nghiệp²
- Lê Khắc Duyên²

¹ Trường Đại học Bách khoa, ĐHQG-HCM

² Viện Nhiệt đới môi trường

TÓM TẮT

Một trong những vấn đề mà toàn cầu quan tâm là tìm kiếm năng lượng thay thế năng lượng hóa thạch, đặc biệt là ở các nước đang phát triển. Trấu, một sinh khối dồi dào tại Việt Nam, đã được sử dụng để thay thế một phần nhiên liệu hóa thạch bằng quá trình khí hóa. Nghiên cứu được tiến hành trên thiết bị khí hóa tầng cố với hai tác nhân khí hóa, không khí tinh khiết và hỗn hợp không khí-hơi nước. Mô hình toán học và mô phỏng bằng máy tính được sử dụng để mô tả và tối ưu hóa các quá trình khí hóa. Mô hình toán học dựa trên phương pháp Computational

Fluid Dynamics và mô phỏng được thực hiện bằng cách sử dụng phần mềm Ansys Fluent. Những thay đổi trong thành phần đầu ra của các thành phần khí tổng hợp (CO , CO_2 , CH_4 , H_2O , H_2) và nhiệt độ của quá trình, trong sự liên hệ với tỉ lệ của hơi nước trong tác nhân khí hóa cũng được trình bày trong tài liệu này. Kết quả thu được cho thấy nồng độ CH_4 , H_2 trong khí đầu ra tăng lên đáng kể khi sử dụng tác nhân hơi-khí so với không khí. Sự khác biệt giữa các tác nhân khí hóa được xác định để cải tiến quá trình thực tế.

Từ khóa: CFD; khí hóa; trấu; Ansys Fluent; UDFs.

REFERENCES

[1]. Thanh Tu DANG, O. Saito, Yugo Yamamoto and A. Tokai, *Scenarios for sustainable biomass use in the Mekong Delta, Vietnam, Journal of Sustainable*

Energy & Environment 1, Journal of Sustainable Energy & Environment, 2010, pp. 137-148.

- [2]. Arvo Leinonen, Nguyen Duc Cuong, *Development of biomass fuel chains in Viet Nam*, 2013.
- [3]. Prabir Basu, Biomass gasification and pyrolysis, Practical Design and Theory, 2010.
- [4]. T. M. Ismail, M. Abd El-Salam, *A numerical model simulation for an updraft gasifier using high temperature steam*, World Academy of Science, Engineering and Technology International Journal of Mechanical, Aerospace, Industrial, Mechatronic and Manufacturing Engineering Vol:8, No:5, 2014.
- [5]. Roshan Budhathoki, *“Three zone modeling of downdraft biomass gasification: Equilibrium and finite kinetic approach”* Master’s Thesis, Department of Chemistry, University of Jyvaskyla, 2013.
- [6]. ANSYS FLUENT 12.0 User's Guide.
- [7]. C. Mandl, I. Obernberger, F. Biedermann, *Modelling of an updraft fixed-bed gasifier operated with softwood pellets*, 2010.
- [8]. Groenveld MJ, van Swaai WPM. *Gasification of char particles with CO₂ and H₂O*. Chem Eng Sci; 35:307-13, 1980.
- [9]. Babu BV, Sheth Pratik N. *Modelling and simulation of reduction zone of downdraft biomass gasifier: effect of char reactivity factor*, Energy Convers Manage, 2005.
- [10].Bhagat PM. Wood charcoal combustion the effects of water application. Combust Flame;37:275-91, 1980.
- [11].ANSYS FLUENT 12.0 Theory Guide.
- [12].Biba V, Macak J, Klose E, Malecha J. *Mathematical model for the gasification of coal under pressure*, Ind Eng Process Des Dev; 17:92-8, 1978.
- [13].ANSYS FLUENT 14.5 Database.
- [14].Suhas D. Doke, Ganesh R. Kale, Sadanand Y. Guhe, *Thermodynamic modeling and experimental study of rice husk pyrolysis*, International Journal of Research in Engineering and Technology, 2015.
- [15].Bambang Suwondo Rahardjo, *Effect of gasifying agent (air + steam) injection towards syngas quality from rice husk gasification*, International Journal of Engineering and Applied Sciences, 2013.